

PC-GSXR003-Seal connector



Features

- Small volume
- Good sealing performance
- Pins are densely arrayed
- OEM Connector


Applications

- Connect with the pressure testing machine for vacuum instruments

Specification

Material	316L,
Insulation resistance	500V \geq 1000M Ω
Seal	1 \times 10 ⁻¹⁰ Pa.m ³ /s
Operating temperature	-55°C-300°C
Withstand pressure	5 MPa
Pin plating	gold (available)

Drawing

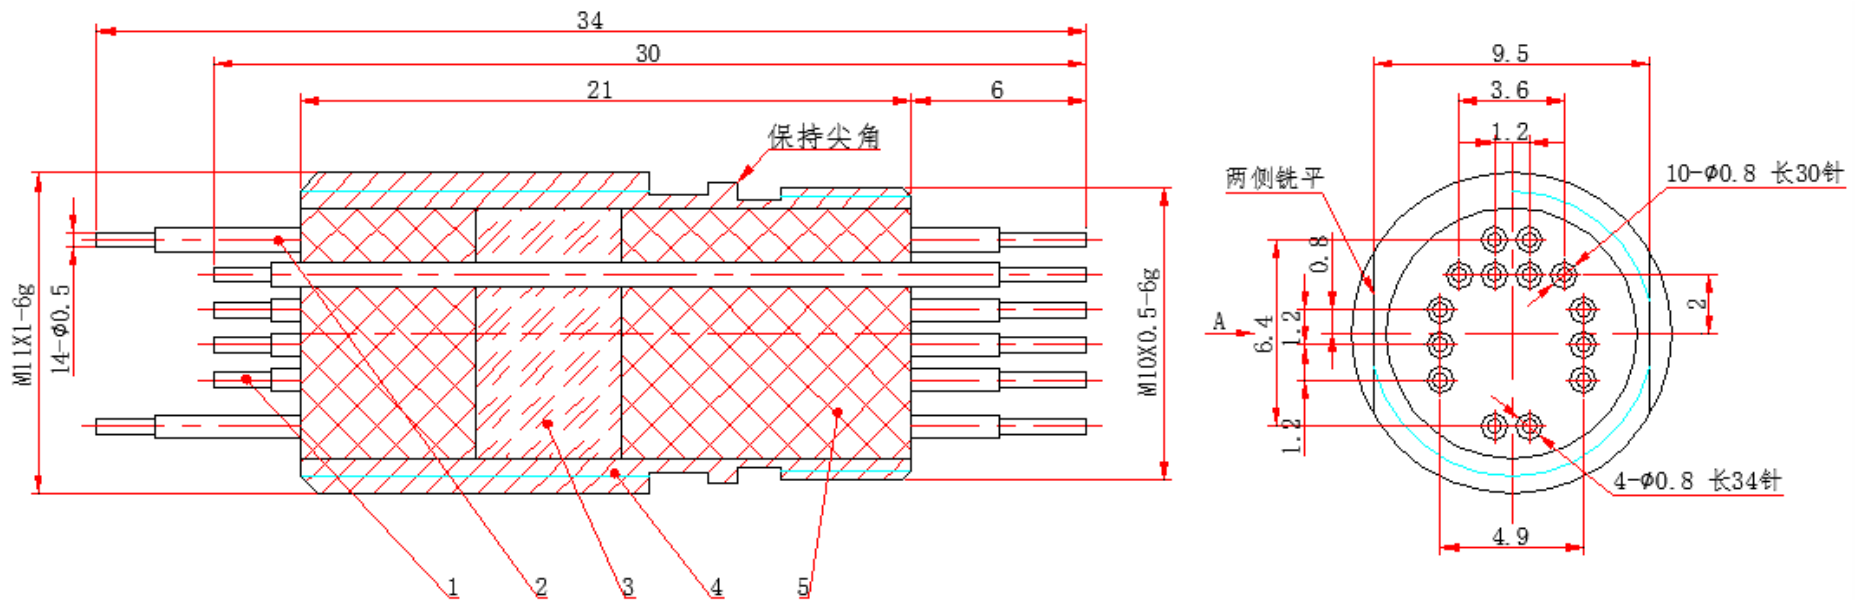



Contact us

Nanjing Wotian Technology Co.,Ltd.

Website: www.wtsensor.com

Add: 5 Wenyong Road, Binjiang Development Zone, Nanjing, 211161, China

E-mail: dr@wtsensor.com